


Top plate installation diagram **Please install in order**

1. Mount the plastic gecko on the ceiling
2. Fix the top plate to the ceiling with self-tapping screws
3. In the case of power failure, connect the lamp body wire and the external power cable

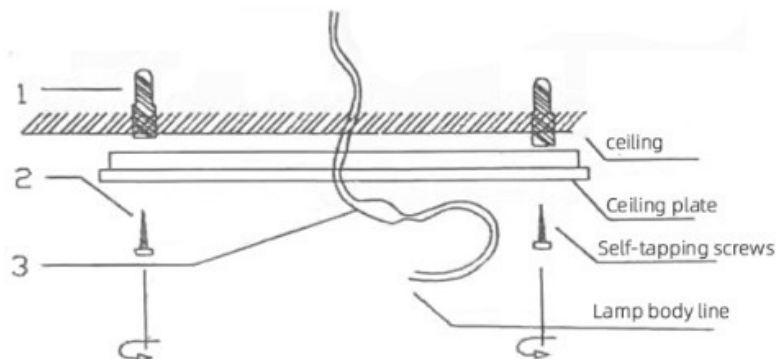

(Voltage 110-240V)

Notice

- 一, Please check that the cables and plugs are intact before use
- 二, do not put anything on the power cord when the lamp is in use
- 三, Please be sure to cut off the power supply during maintenance, otherwise it will cause danger
- 四, do not use damaged lamps, such as lampshade or lamp holder broken, please replace it immediately

clean

- 一, cut off the power and remove the lampshade
- 二, wipe the lamp body and lamp holder with a clean soft cloth
- 三, do not use corrosive solution (alcohol) to clean the lampshade printing, and do not splash water inside the lamp head or lamp body

light source

1. If the light source is not bright or obviously darkened, please replace it in time and be sure to cut off the power first
2. After the light source cools down, remove the power
3. choose the appropriate light source, (recommended to replace the original manufacturer)

